



# LED Floor standing light

## ● BR-FS0006-70W-D01

### Features:


Direct and indirect light control Individually;

Micro reflector design, UGR<6;


Support for smart control functions:

- Touch panel dimming
- Motion sensor
- Day light sensor(optional)

CE certified and all materials are in conformity with RoHS standard.

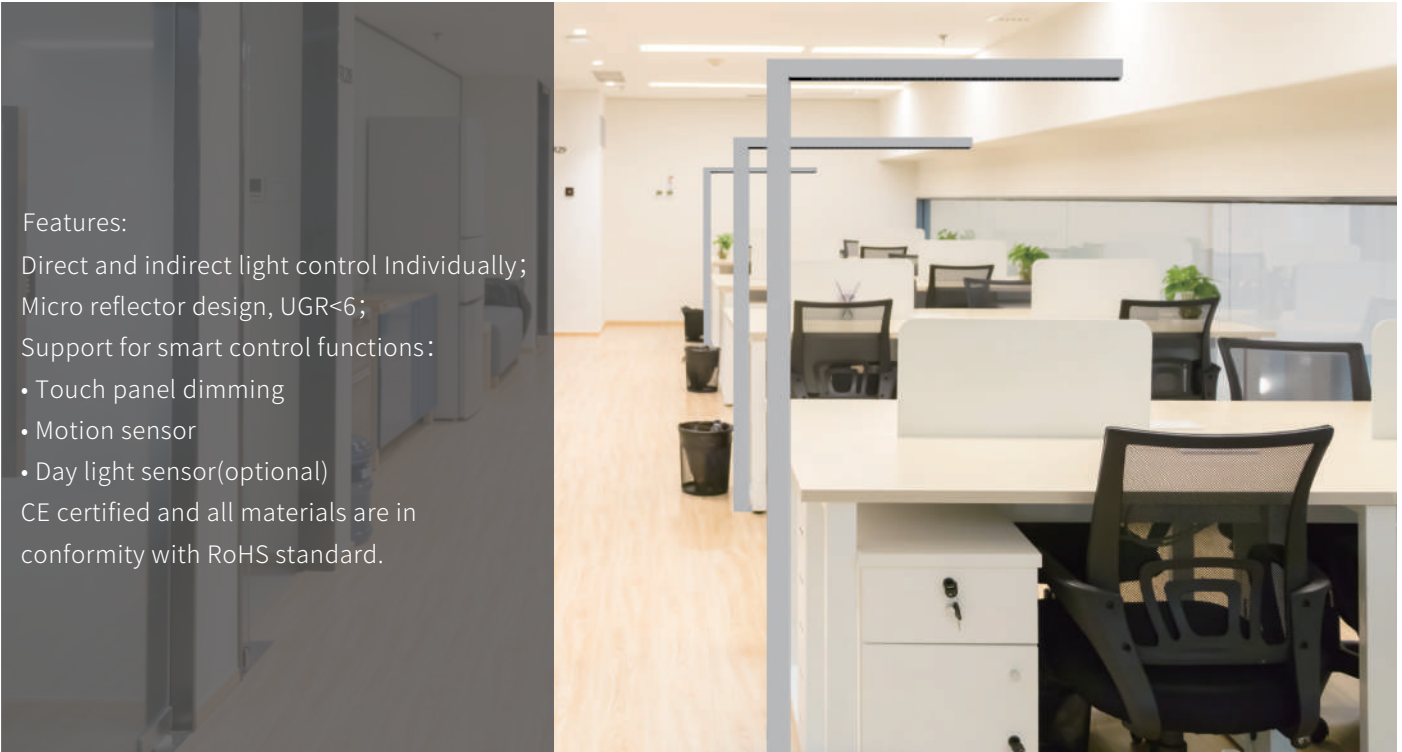


## ◆ Details' display

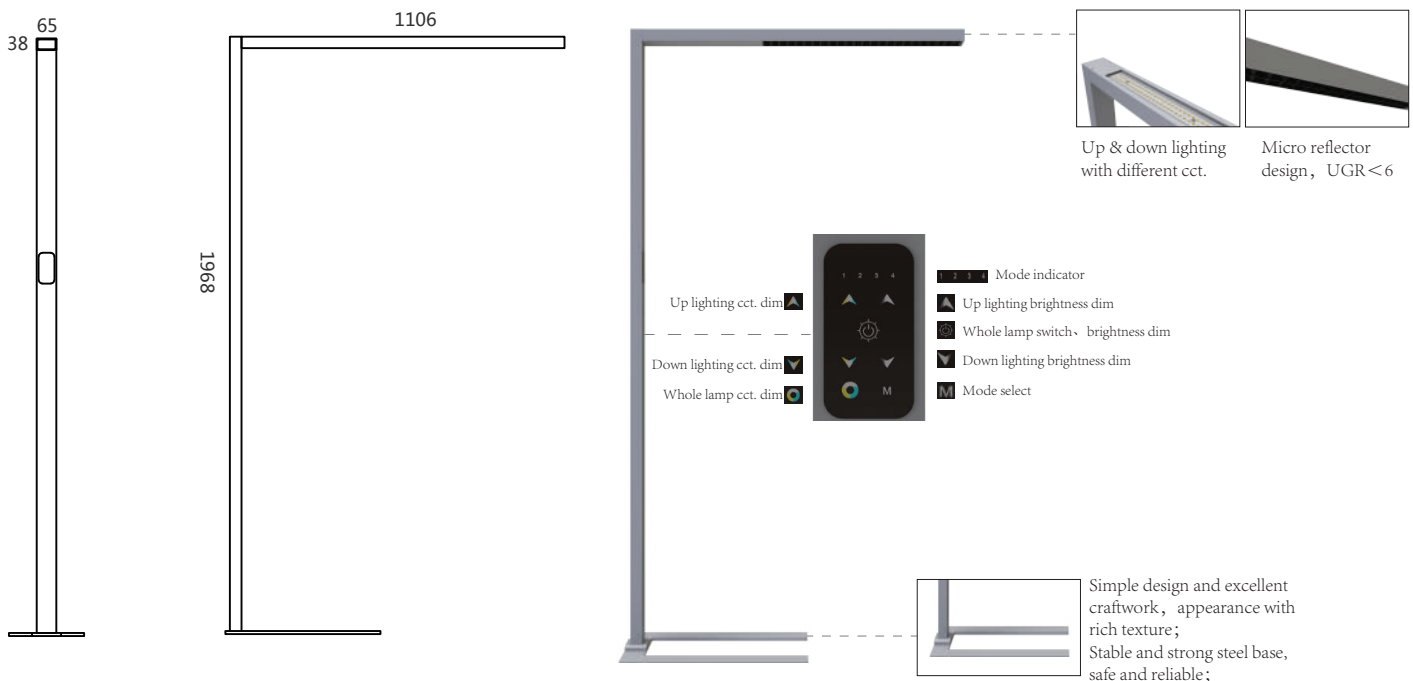




## Light angle

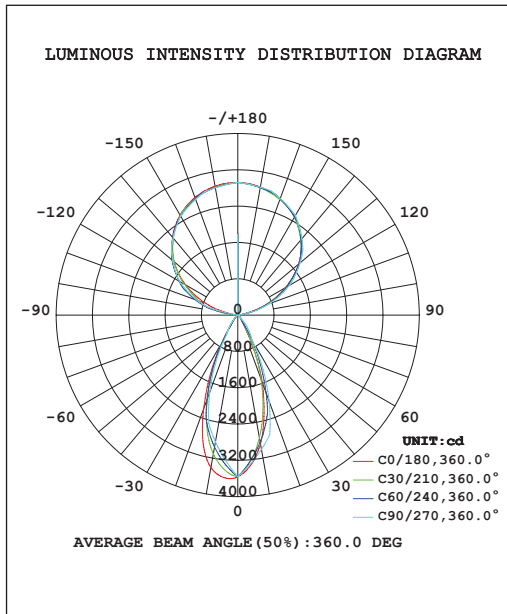

## Light band

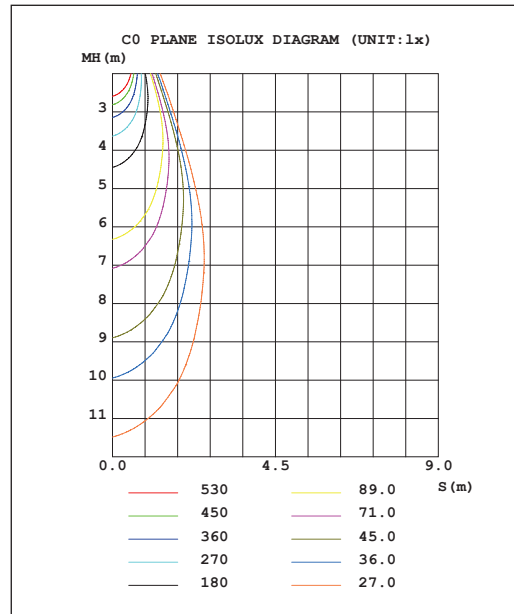

## Technical data

Model Number	BR-FS0006-60W-D01	BR-FS0006-70W-D01
Size	38*65*1968mm	
Input Voltage	200-240V	
Lighting effcet	130LM/W	
Input Power	60w/70w	
Luminous ratio	Indirect ↑ 70%; Direct ↓ 30%;	
Power Factor	>0.9	
Housing Color	RAL7038A(white/black available)	
Luminous Flux	5500 lm indirect/2300lm direct	6400 lm indirect/2700lm direct
CRI (Ra>)	80/90	
UGR	<6	
Dimming type	1-10V	
Working Lifetime(Hour)	>36000	
Lamp Body Material	Aluminum	
Color Temperature	3000K/4000K/5000K/6000K	
Protection Level	IP40	
Working Temperature	-20°C-40°C	
Application	office/conference room/reception	
Light Source	SMD2835 / Everlight / SMD3030 / Philips	
Certification	CE/ROHS/FCC	
Surface Finished	Powder painting	
Feature	Fashion brief	
Beam angle	Indirect ↑ 112°; Direct ↓ 45°;	
warranty	3years	
Packaging size	2023*222*120mm	
Outlet length	2m	